

**Engine** Isuzu A-6BG1QC-02 / 6.49 L  
**Fuel Type** Diesel  
**Capacity @ 600 mm LC** 7,000 kg

# CLG2070H



DIESEL  
PNEUMATIC TIRE FORKLIFTS



TOUGH WORLD. TOUGH EQUIPMENT.

# CLG2070H SPECIFICATIONS >>>

General	Model	1			CLG2070H
	Power Type	2			Diesel
	Base Capacity	3	@ rated load center	kg	7,000
	Load Center	4		mm	600
Weights	Service Weight	5	unloaded	kg	9,300
	Axle Load	6	loaded / unloaded, front	kg	14,460 / 3,800
		7	loaded / unloaded, rear	kg	1,840 / 5,500
Tires	Tire Type	8			Pneumatic
	Wheels	9	front / rear		4 / 2
	Wheelbase	10		mm	2,250
	Tire Size	11	front		8.25-15-14PR
		12	rear		8.25-15-14PR
	Tread Width	13	front / rear		1,474 / 1,730
Mast	Max. Fork Height	14	with std 2-stage mast	mm	3,000
	Freelift	15	with std 2-stage mast	mm	210
	Height, Upright Lowered	16	with std 2-stage mast	mm	2,534
	Height, Upright Extended	17	with std 2-stage mast	mm	4,377
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg	6° / 12°
	Carriage	19	width	mm	1,840
	Fork Spread	20	minimum / maximum	mm	300 / 1,840
	Fork Dimensions	21	T x W x L	mm	65 x 150 x 1,520
Chassis	Length to Fork Face	22	with std 2-stage mast	mm	3,650
	Overall Width	23		mm	2,040
	Overhead Guard Height	24		mm	2,520
	Turning Radius	25	minimum outside	mm	3,560
	Fork Overhang	26	with std 2-stage mast	mm	592
	Right Angle Stack	27	add load length and clearance	mm	5,170
	Ground Clearance	28	minimum loaded	mm	203
		29	center of wheelbase	mm	250
Performance	Travel Speed	30	loaded / unloaded	km/h	23 / 25
	Lift Speed	31	loaded / unloaded	m/s	0.44 / 0.53
	Lower Speed	32	loaded / unloaded	m/s	0.55 / 0.40
	Max. Drawbar Pull	33	loaded	kg	5,500
	Max. Gradeability	34	loaded / unloaded	%	20 / 20
Systems	Brakes	35	service		Foot / Hyd
		36	parking		Hand / Mech
	Engine	37	manufacturer		Isuzu
		38	model		A-6BG1QC-02
		39	emission compliance		Euro Stage I
		40	cylinders		6
		41	displacement	liter	6.49
		42	rated power	kW/rpm	82.4 / 2,000
		43	max. torque	N-m/rpm	416.8 / 1,500

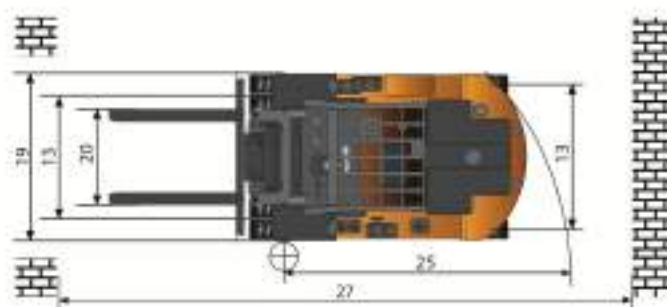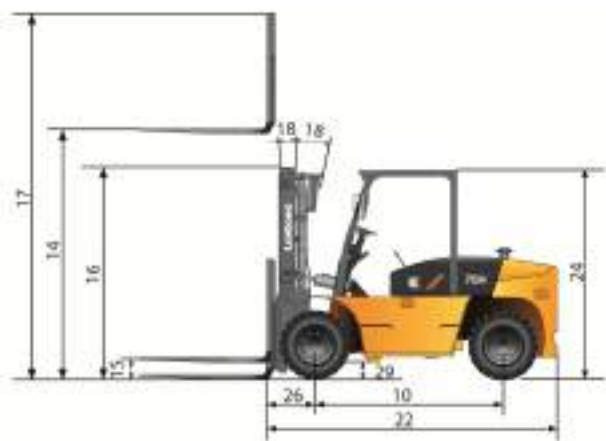

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 3886124 E: overseas@liugong.com  
www.liugong.com

06/2017 Designed by LiuGong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.