

**Engine** Isuzu  
C240-NBKEG-01-C3 / 2.37 L  
**Fuel Type** Diesel  
**Capacity @ 500 mm LC** 2,500 kg



# CPCD25

**DIESEL  
PNEUMATIC TIRE FORKLIFTS**



# CPCD25 SPECIFICATIONS >>>

General	Model	1			CPCD25
	Power Type	2			Diesel
	Base Capacity	3	@rated load center	kg	2,500
	Load Center	4		mm	500
Weights	Service Weight	5	unloaded	kg	3,500
	Axle Load	6	loaded / unloaded, front	kg	5,390 / 1,430
		7	loaded / unloaded, rear	kg	710 / 2,170
Tires	Tire Type	8			Pneumatic
	Wheels	9	front / rear		2 / 2
	Wheelbase	10		mm	1,650
	Tire Size	11	front		7.00-12-12PR
		12	rear		6.00-9-10PR
	Tread Width	13	front / rear		970 / 980
Mast	Max. Fork Height	14	with std 2-stage mast	mm	3,000
	Free lift	15	with std 2-stage mast	mm	145
	Height, Upright Lowered	16	with std 2-stage mast	mm	2,070
	Height, Upright Extended	17	with std 2-stage mast	mm	4,025
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg	6° / 12°
	Carriage	19	width	mm	1,040
	Fork Spread	20	minimum / maximum	mm	222 / 1,010
	Fork Dimensions	21	T x W x L	mm	45 x 100 x 1,070
Chassis	Length to Fork Face	22	with std 2-stage mast	mm	2,630
	Overall Width	23		mm	1,150
	Overhead Guard Height	24		mm	2,100
	Turning Radius	25	minimum outside	mm	2,190
	Fork Overhang	26	with std 2-stage mast	mm	458
	Right Angle Stack	27	add load length and clearance	mm	3,950
	Ground Clearance	28	minimum loaded	mm	120
		29	center of wheelbase	mm	140
Performance	Travel Speed	30	loaded / unloaded	km/h	19 / 20
	Lift Speed	31	loaded / unloaded	m/s	0.46 / 0.50
	Lower Speed	32	loaded / unloaded	m/s	0.55 / 0.40
	Max. Drawbar Pull	33	loaded	kg	1,600
	Max. Gradeability	34	loaded / unloaded	%	18 / 20
Systems	Brakes	35	service		Foot / Hyd
		36	parking		Hand / Mech
		37	manufacturer		Isuzu
	Engine	38	model		C240-NBKEG-01-C3
		39	emission compliance		EU Stage IIIA
		40	cylinders		4
		41	displacement	liters	2.37
		42	rated power	kW/rpm	35.4 / 2,500
		43	Max. torque	N · m/rpm	137.7 / 1,800

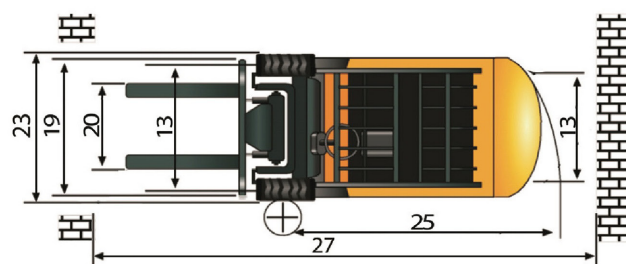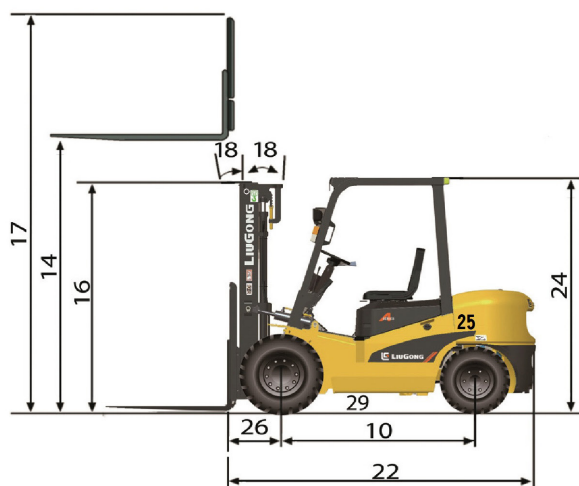

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 3886124 E: overseas@liugong.com  
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.

06/2017 Designed by LiuGong