

CLG2160H

FORKLIFT



KEM Tower Lantai 15, Jl. Landasan Pacu Barat Kav. 2 B-10, Gunung Sahari Selatan, Kemayoran Jakarta Pusat 10610
Phone : +62 21 6570 4111 (Hunting) | Fax : +62 21 6570 4110 | Email : info@probesco.com

Jakarta | Surabaya | Medan | Pekanbaru | Padang | Jambi | Lampung | Palembang | Bengkulu | Balikpapan | Banjarmasin | Pontianak | Sampit | Samarinda | Tarakan | Ketapang | Makassar | Manado | Timika | Kendari

TOUGH WORLD. TOUGH EQUIPMENT.

MAXIMIZE YOUR RETURN ON INVESTMENT

LiuGong's **customer-driven** design and **quality-focused** engineering creates lasting value that will deliver to your bottom line.

DEPENDABLE POWER

Unmatched performance driven by the World-Class Cummins Engine.

ERGONOMIC

Widen operating space and reasonable design can give the operator better experience.



COMFORTABLE

The full hydraulic steering system allows for smooth steering in an ergonomic seating posture, hence improved operator's comfort.

HIGH EFFICIENCY

Newly optimized hydraulic system provides excellent lifting speed, assisting you to finish work efficiently and safely.

GOOD VIEW

The mast and overhead guard are designed for wider view, as well as operator's comfort and safety.



MAINTAINING

The engine hood and rear hood with big angle for easy to maintain.



PARTS

Using genuine LiuGong parts is key to keeping your costs low and your machine in top working order. Our extensive support network is always there when you need it, to maximize your business profitability.


AFTER SALES SERVICE

As a customer of LiuGong you can feel confident that our dealers and regional offices will be there to support you with training, service and maintenance needed throughout the life of your machine.

SPECIFICATION


APPLICATION

General	Model	1		CLG2160H
	Power Type	2		Diesel
	Base Capacity	3	@rated load center	kg 16,000
	Load Center	4		mm 600
Weights	Service Weight	5	unloaded	kg 19,750
	Axle Load	6	loaded / unloaded, front	kg 32,555 / 9,360
		7	loaded / unloaded, rear	kg 3,195 / 10,390
Tires	Tire Type	8		Pneumatic
	Wheels	9	front / rear	4 / 2
	Wheelbase	10		mm 3,500
	Tire Size	11	front	12.00-20-18PR
		12	rear	12.00-20-18PR
Mast	Tread Width	13	front / rear	1,844 / 2,000
	Max. Fork Height	14	with std 2-stage mast	mm 4,000
	Free lift	15	with std 2-stage mast	mm 20
	Height, Upright Lowered	16	with std 2-stage mast	mm 3,879
	Height, Upright Extended	17	with std 2-stage mast	mm 5,879
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg 6° / 12°
	Carriage	19	width	mm 2,130
	Fork Spread	20	minimum / maximum	mm 470 / 2,050
	Fork Dimensions	21	T x W x L	mm 87x200x1,500
	Chassis	Length to Fork Face	22	with std 2-stage mast
Overall Width		23		mm 2,537
Overhead Guard Height		24		mm 2,900
Turning Radius		25	minimum outside	mm 4,885
Fork Overhang		26	with std 2-stage mast	mm 974
Right Angle Stack		27	add load length and clearance	mm 7,560
Ground Clearance		28	minimum loaded	mm 340
		29	center of wheelbase	mm 348
Performance	Travel Speed	30	loaded / unloaded	km/h 23 / 26
	Lift Speed	31	loaded / unloaded	m/s 0.33 / 0.41
	Lower Speed	32	loaded / unloaded	m/s 0.32 / 0.34
	Max. Drawbar Pull	33	loaded	kg 11,100
	Max. Gradeability	34	loaded / unloaded	% 28 / 26
	Systems	Brakes	35	service
36			parking	Button / Hyd
Engine		37	manufacturer	Cummins
		38	model	QSB6.7
		39	emission compliance	EU Stage IIIA
		40	cylinders	6
		41	displacement	liters 6.70
		42	rated power	kW/rpm 129 / 2,200
		43	Max. torque	N · m/rpm 800 / 1,400

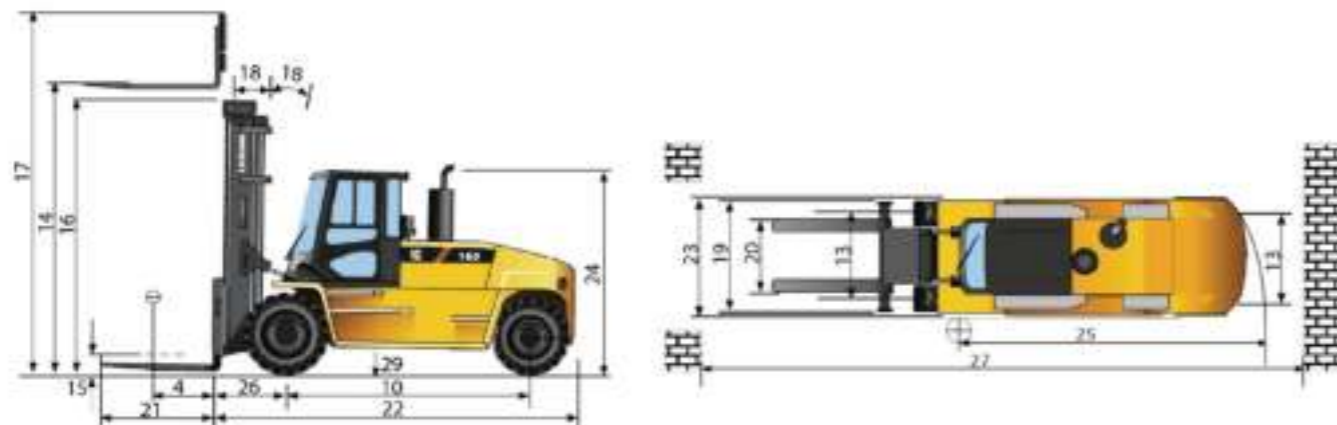

CAPACITY

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest	Mast Tilt Angle (F/B)	Rated Load Capacity		Total Weight with Standard Forks
					With Standard Forks	With Sideshifter	
					CLG2160H	CLG2160H	
	mm	mm	mm	degree	kg @ (600mm LC)	kg @ (600mm LC)	Kg
Standard 2-Stage	2700	3225	90	6 / 12	16000	15200	19200
	3000	3375	90	6 / 12	16000	15200	19300
	4000	3875	90	6 / 12	16000	15200	19750
	4500	4125	90	6 / 12	16000	15200	19900
	5000	4375	90	6 / 6	15350	14550	20050
	5500	4675	90	6 / 6	14700	13900	20350
	6000	4925	90	3 / 6	14050	13250	20500

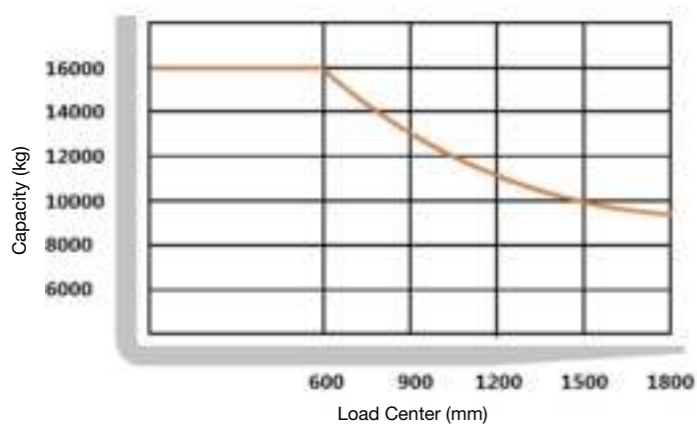

Note:
Vertical axle stands for load capacity while horizontal axle stands for load center, Load center is the distance counted from the front of the fork. The base point of the standard load is the center point of the cubic with the same 1200mm dimension in length, width and height. The load capacity should be down if mast tilt forward or using non-standard forks of loading goods with extra width. Please realize the different load capacity between different load centers according to load chart.

STANDARD CONFIGURATION

POWER SYSTEM

- Cummins QSB6.7 diesel engine
- ZF automatic transmission
- Kessler drive axle with wet disc brakes
- Heavy duty steering axle
- Elevated air pre-cleaner
- Fuel system pre-filter
- Radiator
- Vertical exhaust

HYDRAULIC SYSTEM

- 4-function hydraulic valve
- Hydrostatic steering
- Oil filter for intake and return

ELECTRIC SYSTEM

- 2 batteries
- Front flood lights
- Front steering lights
- Amber warning lights
- Rear working lights
- Buzzer for back off

UNDERCARRIAGE

- High strength frame
- 1 piece counterweight
- Tow pin
- Air filled pneumatic drive tires
- Air filled pneumatic steer tires

MAST

- 4.0M Standard 2-stage mast
- 2130mm Wide shaft type carriage
- Load backrest
- 1500mm long shaft type pallet forks

OPERATOR STATION

- Closed cabin with AC and heater
- Locks for engine hood
- Grammer full suspension seat
- Ignition lock
- Display with alarms, fuel rate, water temperature, working hour
- Tilt steering column
- Inching, brake and accelerator pedals
- Parking button
- Fire extinguisher
- Floor mat

OPTIONAL CONFIGURATION

POWER SYSTEM

- License plate light

MAST

- Higher 2-stage mast
- Longer shaft type pallet forks

OPERATION STATION

- Master key

ELECTRIC SYSTEM

- License plate light

UNDERCARRIAGE

- Solid pneumatic drive tires
- Solid pneumatic steer tires